



DX-3 / -5 Pin Up Dimensions

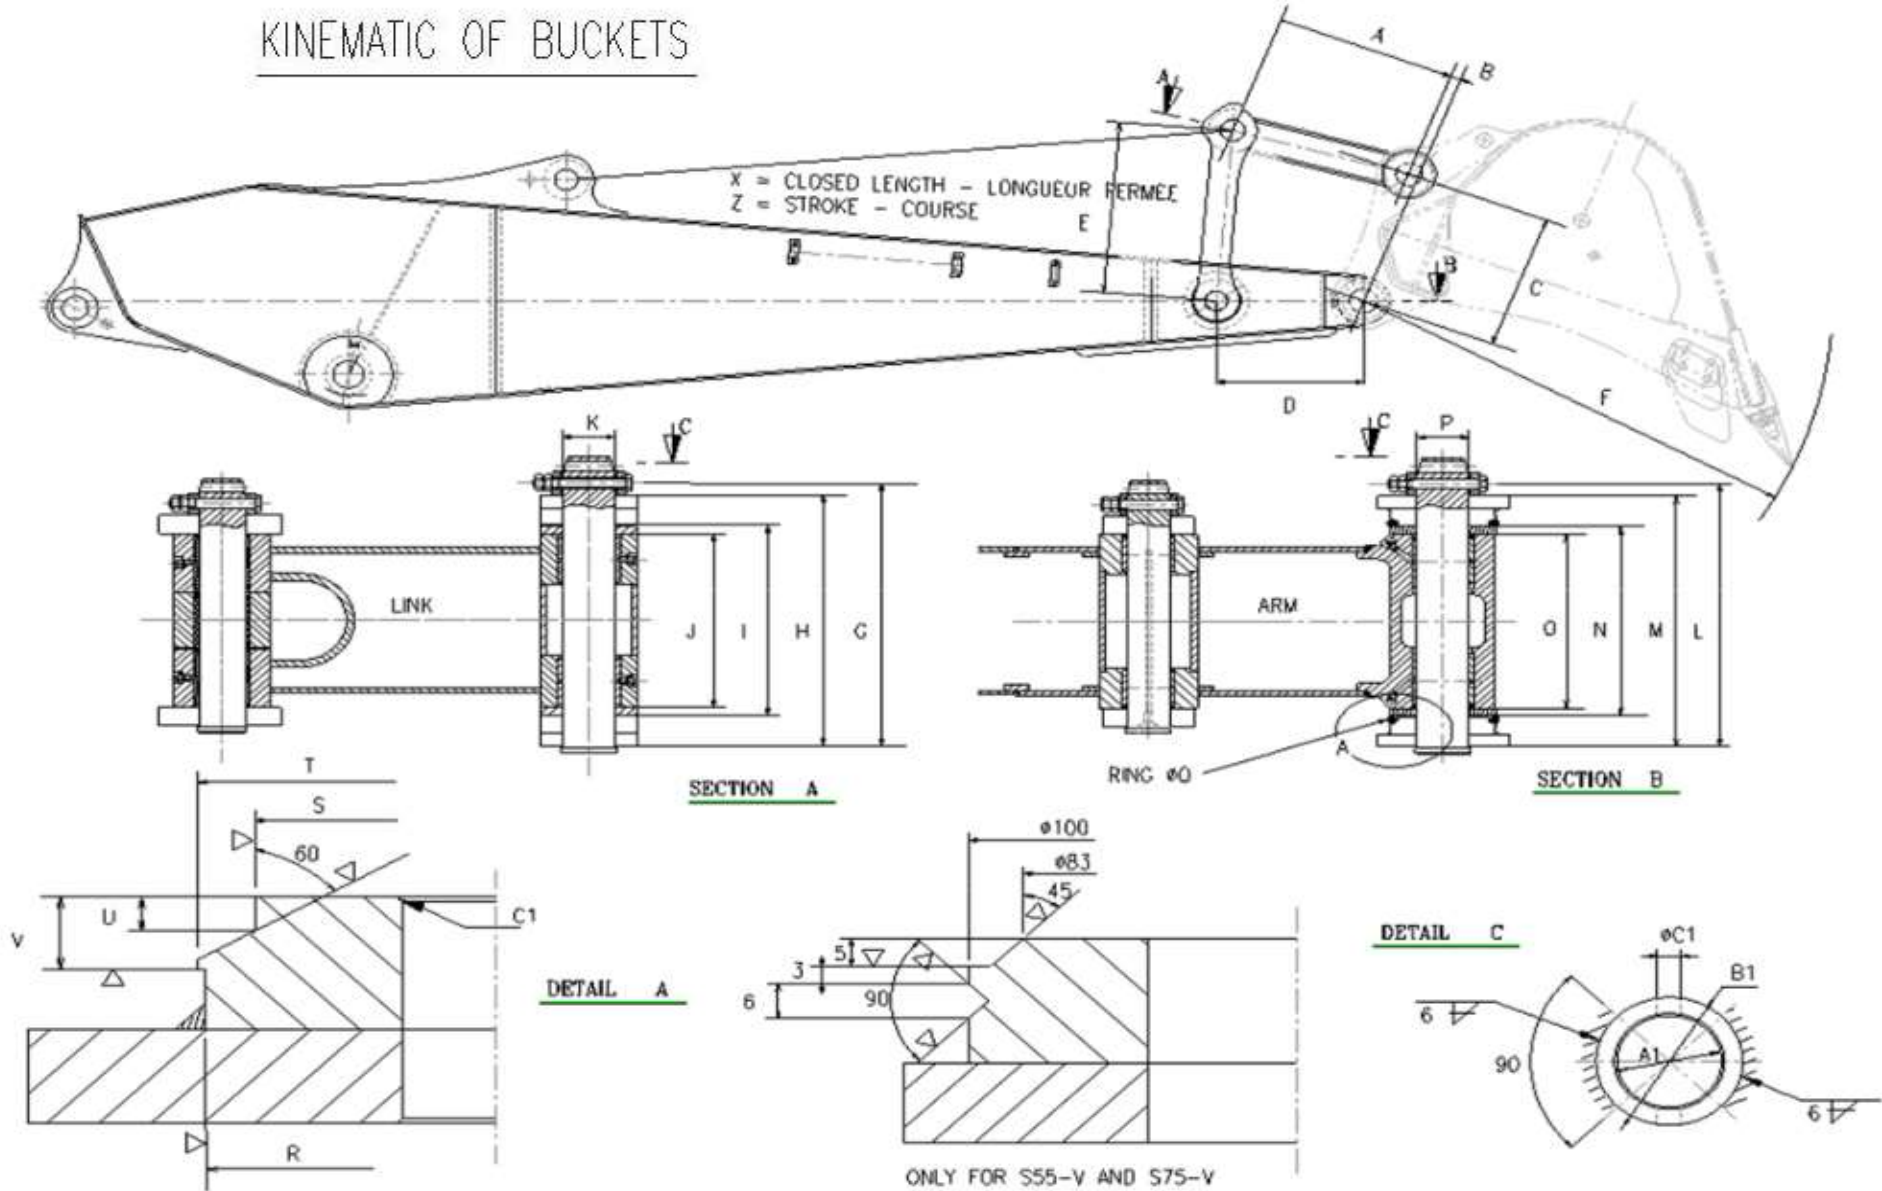


DX-3 / -5 Pin Up Dimensions

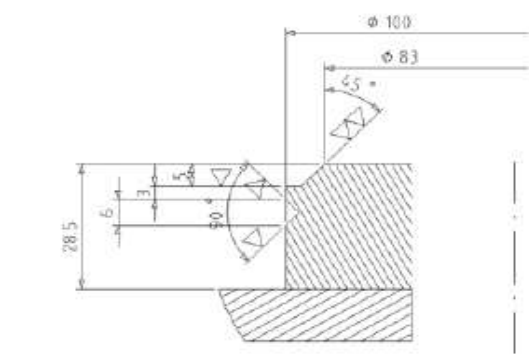


Detail D

FOR DX55 AND DX60Z

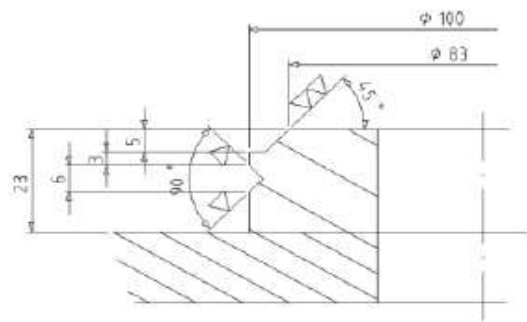

Detail E

FOR DX80Z

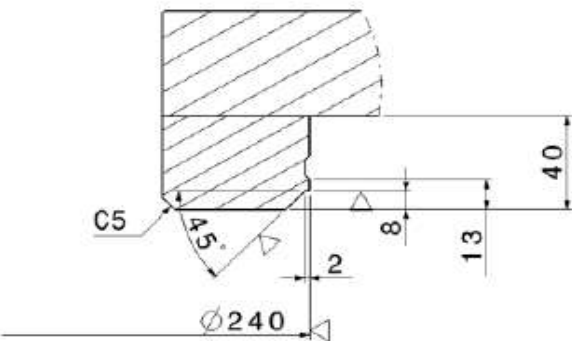

Detail G

Pin & Hole Tolerance

PIN O.D	O.D Tolerance	Hole I.D	I.D Tolerance
ø 45	-0.05 ~ -0.07	ø 45	+0.05 ~ 0.10
ø 65	-0.06 ~ -0.11	ø 65	+0.10 ~ 0.15
ø 71	-0.06 ~ -0.11	ø 71	+0.10 ~ 0.15
ø 80	-0.06 ~ -0.11	ø 80	+0.10 ~ 0.15
ø 90	-0.10 ~ -0.15	ø 90	+0.10 ~ 0.15
ø 100	-0.10 ~ -0.15	ø 100	+0.10 ~ 0.15
ø 110	-0.10 ~ -0.15	ø 110	+0.10 ~ 0.15
ø 120	-0.10 ~ -0.15	ø 120	+0.10 ~ 0.15

DX-3 / -5 Pin Up Dimensions

MODEL	A	B	C	D	E	F	X	Z	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	A1	B1	C1
DX62R-3	320	54	257	240	337	R887.4	925	600	253	236	155	155	¢ 45	253	236	155	155	¢ 45	7	DETAIL D					¢ 47	¢ 80	13.5
DX63-3	320	54	257	240	337	R887.4	925	600	253	236	155	155	¢ 45	253	236	155	155	¢ 45	7	DETAIL D					¢ 47	¢ 80	13.5
DX85R-3	350	73	282	260	390	R1009.0	1070	690	305	278	200	200	¢ 45	305	278	200	200	¢ 45	7	DETAIL E					¢ 46	¢ 70	17
DX140LC-3 / -5	450	92	408	350	510	R1232.5	1375	900	384	360	260	250	¢ 65	384	360	260	250	¢ 65	12	140	120	142	7	16	¢ 69	¢ 96	18
DX140LCR-3 / -5	450	92	408	350	510	R1232.5	1375	900	384	360	260	250	¢ 65	384	360	260	250	¢ 65	12	140	120	142	7	16	¢ 69	¢ 96	18
DX140W-3 / -5	450	92	408	350	510	R1232.5	1375	900	384	360	260	250	¢ 65	384	360	260	250	¢ 65	12	140	120	142	7	16	¢ 69	¢ 96	18
DX170LC-5 Serial No. 001001 - 001522	530	55	415	380	570	R1357.6	1455	995	405	384	278	278	¢ 71	405	384	278	278	¢ 71	12	140	120	142	7	16	¢ 75	¢ 102	18
DX170LC-5 Serial No. 001523 -	530	30.5	419	380	570	R1430.5	1455	995	460	439	333	333	¢ 80	460	439	333	333	¢ 80	13	165	140	168	7	16	¢ 84	¢ 112	18
DX180LC-3 / -5	560	32	464	450	600	R1430.5	1525	1025	460	439	333	305	¢ 80	460	439	333	305	¢ 80	13	165	140	168	7	16	¢ 84	¢ 112	18
DX190W-3 / -5	560	32	464	450	600	R1430.5	1525	1025	460	439	333	305	¢ 80	460	439	333	305	¢ 80	13	165	140	168	7	16	¢ 84	¢ 112	18
DX210W-3 / -5	585	32	463	450	608	R1472.3	1630	1060	461	439	333	305	¢ 80	461	439	333	305	¢ 80	13	165	140	168	7	17	¢ 84	¢ 112	18
DX225LC-3 / -5	585	32	463	450	608	R1472.3	1630	1060	461	439	333	305	¢ 80	461	439	333	305	¢ 80	13	165	140	168	7	17	¢ 84	¢ 112	18
DX235LCR-3 / -5	585	32	463	450	608	R1472.3	1630	1060	461	439	333	305	¢ 80	461	439	333	305	¢ 80	13	165	140	168	7	17	¢ 84	¢ 112	18
DX225LC-3 / -5 SLR	450	46	405	350	510	R1220.0	1375	900	383	360	260	250	¢ 65	383	360	260	250	¢ 65	12	140	120	142	7	16	¢ 69	¢ 96	18
DX225LC-5 RB	585	32	463	450	608	R1472.3	1630	1060	461	439	333	305	¢ 80	461	439	333	305	¢ 80	13	165	140	168	7	17	¢ 84	¢ 112	18
DX255LC-3 / -5	585	42	488	450	608	R1486.8	1640	1080	461	439	333	305	¢ 80	461	439	333	305	¢ 80	13	165	140	168	7	17	¢ 84	¢ 112	18
DX300LC-3 / -5	600	65	508	475	661	R1614.6	1710	1150	533	512	394	394	¢ 90	549	512	394	366	¢ 90	13	180	160	183	8	17	¢ 94	¢ 134	22
DX300LC-3 / -5 SLR	450	46	405	350	510	R1220.	1375	900	383	360	260	250	¢ 65	383	360	260	250	¢ 65	12	140	120	142	7	16	¢ 69	¢ 96	18
DX300LL-5 RB	600	65	508	475	661	R1614.6	1710	1150	533	512	394	394	¢ 90	549	512	394	366	¢ 90	13	180	160	183	8	17	¢ 94	¢ 134	22

DX-3 / -5 Pin Up Dimensions

MODEL	A	B	C	D	E	F	X	Z	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	A1	B1	C1
DX300LC-5K	600	65	508	475	661	R1614.6	1710	1150	533	512	394	394	¢ 90	549	512	394	366	¢ 90	13	180	160	183	8	17	¢ 94	¢ 134	22
DX350LC-5	650	90	550	475	730	R1703.8	1870	1300	549	528	408	408	¢ 100	592	528	408	380	¢ 100	13	200	180	203	8	17	¢ 104	¢ 144	22
DX350LC-5K	650	90	550	475	730	R1703.8	1870	1300	549	528	408	408	¢ 100	592	528	408	380	¢ 100	13	200	180	203	8	17	¢ 104	¢ 144	22
DX380LL-5 RB	650	90	550	475	730	R1703.8	1870	1300	549	528	408	408	¢ 100	592	528	408	380	¢ 100	13	200	180	203	8	17	¢ 104	¢ 144	22
DX420LC-3 / -5	700	90	535	475	750	R1727.9	1950	1320	605	582	440	440	¢ 110	656	582	440	404	¢ 110	13	220	200	223	8	17	¢ 114	¢ 154	22
DX490LC-3 /-5	700	118	576	520	760	R1824.3	2041	1325	643	620	470	470	¢ 120	643	620	470	434	¢ 120	10	206	190	210	8	13	¢ 124	¢ 164	24
DX490LC-5K	700	118	576	520	760	R1824.3	2041	1325	643	620	470	470	¢ 120	643	620	470	434	¢ 120	10	206	190	210	8	13	¢ 124	¢ 164	24
DX530LC-3 / -5	700	118	576	520	760	R1824.3	2041	1325	643	620	470	470	¢ 120	643	620	470	434	¢ 120	10	206	190	210	8	13	¢ 124	¢ 164	24
DX530LC-3 / -5 SLR	585	32	463	450	608	R1472.3	1630	1060	461	439	333	333	¢ 80	461	439	333	305	¢ 80	13	165	140	168	7	17	¢ 84	¢ 112	18
DX530LC-5K	700	118	576	520	760	R1824.3	2041	1325	643	620	470	470	¢ 120	643	620	470	434	¢ 120	10	206	190	210	8	13	¢ 124	¢ 164	24
DX800LC-7	800		630	590	850	R2146	2220	1465	X	690	500	500	¢ 140	X	690	500	460	¢ 140	13	DETAIL G					X	X	X