



DX-7 Pin Up Dimensions

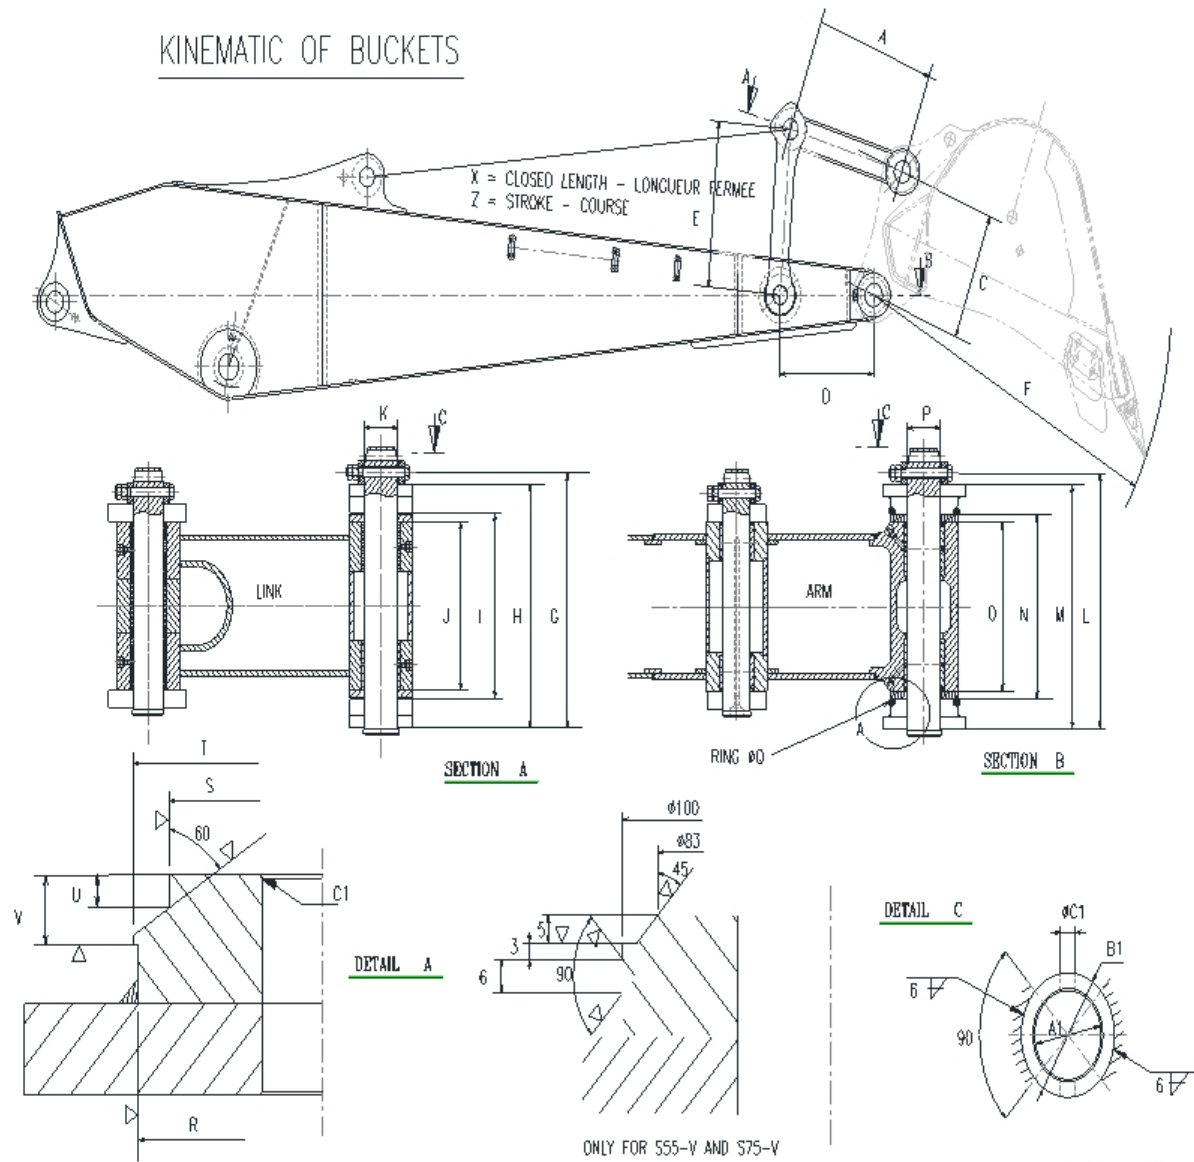


DX-7 Pin Up Dimensions

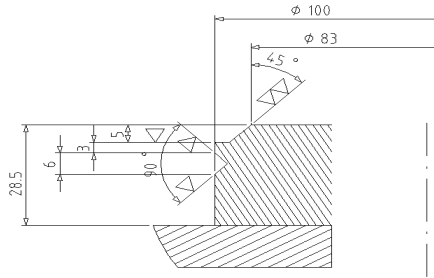


Detail D

FOR DX55 AND DX60Z

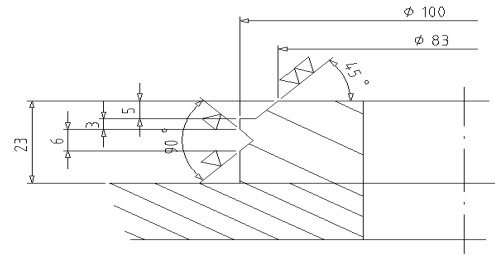


Detail E

FOR DX80Z

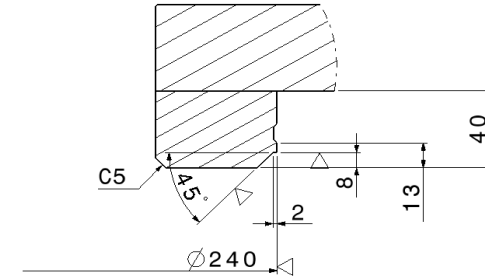

Detail G

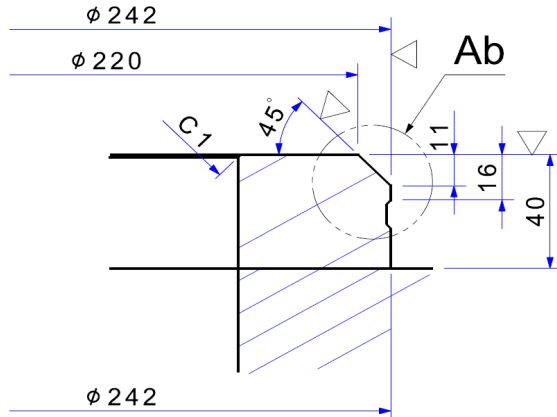

DETAIL Aa (1:2)

FOR DX700LC/DX800LC-5/DX800LC-7

Pin & Hole Tolerance

PIN O.D	O.D Tolerance	HOLE I.D	I.D Tolerance
Ø45	-0.05~-0.07	Ø45	+0.05~0.10
Ø50	-0.05~-0.07	Ø50	
Ø55	-0.05~-0.07	Ø55	
Ø60	-0.06~-0.11	Ø60	
Ø65	-0.06~-0.11	Ø65	+0.1~0.15
Ø71	-0.06~-0.11	Ø71	+0.1~0.15
Ø80	-0.06~-0.11	Ø80	+0.1~0.15
Ø90	-0.10~-0.15	Ø90	+0.1~0.15
Ø100	-0.10~-0.15	Ø100	+0.1~0.15
Ø105	-0.10~-0.15	Ø105	+0.1~0.15
Ø110	-0.10~-0.15	Ø110	+0.1~0.15
Ø120	-0.10~-0.15	Ø120	+0.1~0.15
Ø125	-0.10~-0.15	Ø125	+0.1~0.15
Ø130	-0.10~-0.15	Ø130	+0.1~0.15
Ø140	-0.10~-0.15	Ø140	+0.1~0.15

DX-7 Pin Up Dimensions

MODELS	A	B'	C'	C	D	E	F	X	Z	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	A1	B1	C1
DX27Z-7	245			180.0	170	250	R704.3	690	435	212	190	135	134.5	¢ 35	212	190	135	134.5	¢ 35	5	80	65	80	5	16	¢ 37	¢ 60	12
DX35Z-7	290			200.0	180	294	R760.3	800	515	212	190	135	134.5	¢ 35	212	190	135	134.5	¢ 35	5	80	65	80	5	15.5	¢ 42	¢ 58	11
DX42-7	300			222.0	200	305	R767.1	800	515	253	-	155	135	¢ 45	253	-	155	135	¢ 45	7	-	-	-	-	-	-	-	-
DX50Z-7/DX55R-7	320	54	257	262.6	240	337	R887.8	925	600	252	236	155	155	¢ 45	252	236	155	155	¢ 45	7	DETAIL D					¢ 47	¢ 80	13.5
DX62R-7/DX63-7	320	54	257	262.6	240	337	R887.8	925	600	252	236	155	155	¢ 45	253	236	155	155	¢ 45	7	DETAIL D					¢ 47	¢ 80	13.5
DX89R-7	350	73	282	291.3	260	390	R1009.	1070	690	302	278	200	200	¢ 45	302	278	200	200	¢ 45	7	DETAIL E					¢ 46	¢ 70	17
DX140LC-7/DX140LCR-7/DX140W-7	450	46	405	407.6	350	510	R1232.5	1375	900	384	360	260	260	¢ 65	384	360	260	250	¢ 65	12	140	120	142	7	16	¢ 69	¢ 96	18
DX170LC-7	560	32	463	464.1	450	600	R1430.5	1525	1025	460	439	330	330	¢ 80	460	439	330	305	¢ 80	13	165	140	168	7	16	¢ 84	¢ 112	18
DX190W-7	560	32	463	464.1	450	600	R1430.5	1525	1025	460	439	330	330	¢ 80	460	439	330	305	¢ 80	13	165	140	168	7	16	¢ 84	¢ 112	18
DX200LC-7	585	32	463	464.1	450	608	R1472.3	1630	1060	461	439	330	330	¢ 80	461	439	330	305	¢ 80	13	165	140	168	7	17	¢ 84	¢ 112	18
DX225LC-7/DX235LCR-7/DX210W-7	585	32	463	464.1	450	608	R1472.3	1630	1060	461	439	330	330	¢ 80	461	439	330	305	¢ 80	13	165	140	168	7	17	¢ 84	¢ 112	18
DX255LC-7	585	42	488	489.8	450	608	R1486.8	1640	1080	461	439	330	330	¢ 80	461	439	330	305	¢ 80	13	165	140	168	7	17	¢ 84	¢ 112	18
DX300LC-7	600	65	508	512.1	475	661	R1614.6	1710	1150	533	512	394	394	¢ 90	533	512	394	366	¢ 90	13	180	160	183	8	17	¢ 94	¢ 134	22
DX350LCR-7	600	65	508	512.1	475	661	R1614.6	1710	1150	533	512	394	394	¢ 90	533	512	394	366	¢ 90	13	180	160	183	8	17	¢ 94	¢ 134	22
DX300LC-7 SLR	450	46	405	407.6	350	510	R1220.	1375	900	383	360	260	260	¢ 65	383	360	260	250	¢ 65	12	140	120	142	7	16	¢ 69	¢ 96	18
DX350LC-7	650	90	550	557.3	475	730	R1703.8	1870	1300	549	528	408	408	¢ 100	549	528	408	380	¢ 100	13	200	180	203	8	17	¢ 104	¢ 144	22
DX420LC-7	700	90	535	542.5	475	750	R1727.9	1950	1320	603	582	440	440	¢ 110	603	582	440	404	¢ 110	13	220	200	223	8	17	¢ 114	¢ 154	22
DX490LC-7/DX530LC-7	700	118	576	588.0	520	760	R1824.3	2041	1325	643	620	470	470	¢ 120	643	620	470	434	¢ 120	10	206	190	210	8	13	¢ 124	¢ 164	24
DX530LC-7 SLR	585	32	463	464.1	450	608	R1472.3	1630	1060	461	439	333	333	¢ 80	461	439	333	305	¢ 80	13	165	140	168	7	17	¢ 84	¢ 112	18
DX800LC-7	800	80.7	627.6	632.8	590	850	R2146.	2220	1465	X	700	500	500	¢ 140	X	700	500	460	¢ 140	13	DETAIL Aa					X	X	X
DX1000LC-7	810	47	748.5	750.0	640	930	R2424.3	2220	1465	X	840	620	620	¢ 150	X	840	620	500	¢ 150	13	DETAIL Aa					X	X	X